


SLAM SPECIALTIES SSF6-6

5845 E. Terrace Ave. Fresno, CA - 93727 - PH: 888.352.5225 FAX: 559.348.9063 www.slamspecialties.com

- Over 1" More stroke than RE Models
- Up to 40% Lighter than RE Models
- Lightest Bag in its Class
- 200 PSI Rated
- Responsive through (1) 3/8" PTC port
- Linear and Off-Axle Actuation
- Non- Ballooning Operation
- Vibration Isolation

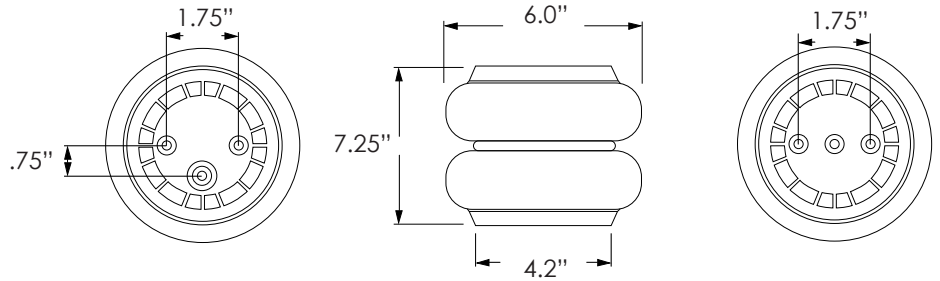

Model	SSF6-6
Diameter "O" PSI	6"
Diameter Max PSI	6"
Max PSI	200
Plate Material	Composite
Min Height	2.7"
Max Height	11"
Mounting (top)	(2) 3/8" - 16
Mounting (bottom)	(3) 3/8" - 16
Air Port PTC	(1) 3/8"
Internal Bump Stops	Integratd
Force to Collapse	130 lbs
Shipping Weight ea.	2.3 lbs
Replaces -	
Firestone	255
Goodyear	2B6

Dynamic Characteristics at 6.5 in. Design Height				
Volume @ 100 PSIG = 99.0 in ³			Natural Frequency	
Gauge Pressure	Load (lbs.)	Spring Rate	CPM	HZ
40	-	-	-	-
60	-	-	-	-
80	-	-	-	-
100	1675	875	135.9	2.26

Lift Chart - Force In Pounds

Air Pressure

		40	80	100	120	140	160	180	200
Height Inches	3	1021	2041	2552	3062	3572	4083	4593	5103
	4	985	1970	2463	2956	3448	3941	4433	4925
	5	950	1901	2376	2851	3326	3801	4276	4751
	6	916	1832	2291	2748	3206	3664	4122	4580
	7	882	1765	2260	2647	3089	3530	3974	4412
	8	849	1699	2124	2546	2973	3398	3823	4248
	9	817	1634	2043	2451	2860	3269	3677	4085
	10	785	1571	1963	2356	2749	3142	3534	3926
	11	753	1507	1883	2260	2636	3013	3389	3766