


SLAM SPECIALTIES SSF6-8

5845 E. Terrace Ave. Fresno, CA - 93727 - PH: 888.352.5225 FAX: 559.348.9063 www.slamspecialties.com

- Over 1" more stroke than RE Models
- Up to 40% Lighter than RE Models
- Lightest Bag in its Class
- 200 PSI Rated
- Responsive through (1) 3/8" PTC port
- Linear and Off-Axis Actuation
- Non-Ballooning Operation
- Vibration Isolation
- Load Leveling for Hauling or Towing

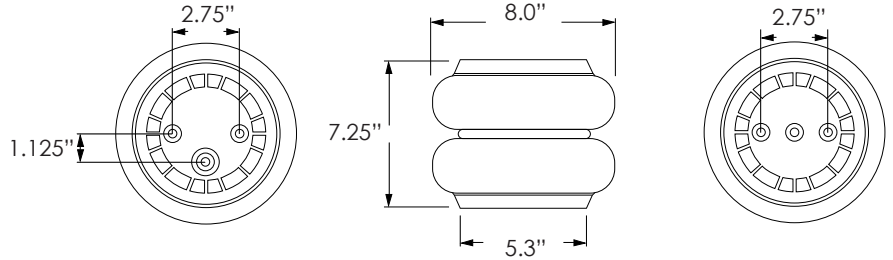

Model	SSF6-8
Diameter "O" PSI	8"
Diameter Max PSI	8"
Max PSI	200
Plate Material	Composite
Min Height	2.7"
Max Height	13"
Mounting (top)	(2) 3/8" -16
Mounting (bottom)	(3) 3/8" -16
Air Port PTC	(1) 3/8"
Internal Bump Stops	Integrated
Force to Collapse	30 lbs
Shipping Weight ea.	3.9lbs
Replaces -	
Firestone	26
Goodyear	2B8

Dynamic Characteristics at 7 in. Design Height				
Volume @ 100 PSIG = 179.6 in ³			Natural Frequency	
Gauge Pressure	Load (lbs.)	Spring Rate	CPM	HZ
40	-	-	-	-
60	-	-	-	-
80	-	-	-	-
100	2850	1064	114.9	1.91

Lift Chart - Force In Pounds

Air Pressure

		40	80	100	120	140	160	180	200
Height Inches	3	1767	3534	4418	5301	6185	7069	7952	8835
	4	1720	3441	4301	5161	6021	6881	7742	8603
	5	1674	3348	4185	5022	5860	6697	7534	8371
	6	1629	3257	4072	4886	5700	6514	7329	8144
	7	1584	3167	3959	4751	5543	6335	7127	7919
	8	1539	3079	3848	4618	5388	6158	6927	7696
	9	1496	2991	3739	4487	5235	5983	6731	7479
	10	1453	2905	3632	4358	5084	5811	6537	7263
	11	1410	2821	3526	4231	4936	5641	6346	7051
	12	1367	2735	3418	4102	4785	5469	6152	6836
13	1325	2651	3313	3976	4638	5301	5963	6626	